






浴室柜颜色选择器

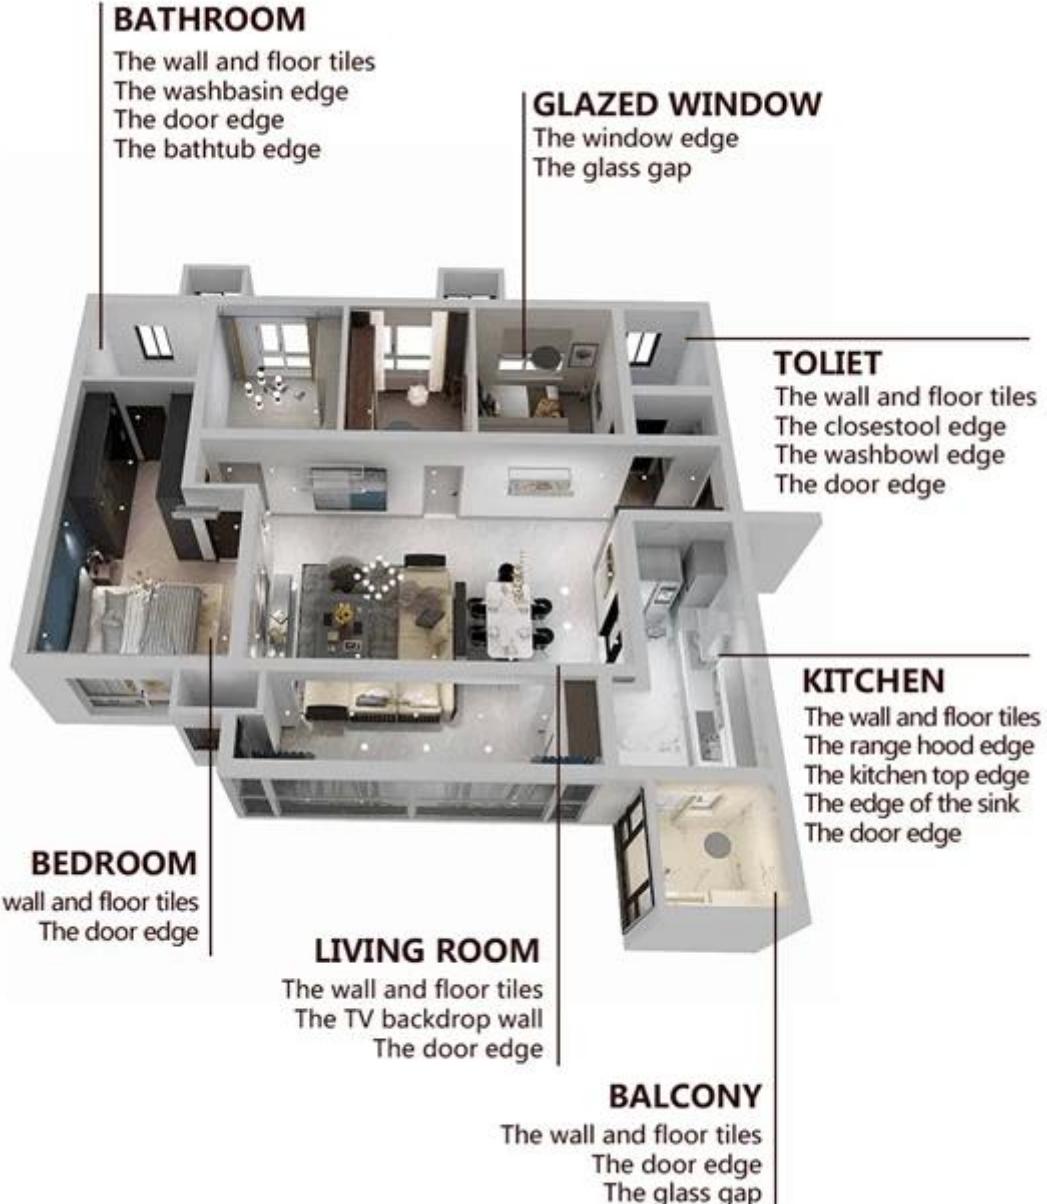

浴室
厨房
卫生间
阳台
卧室
客厅



Clean the tiles and
keep it dry



Polish with tile wax
except the glazed
tile



Open & Watch, both
sides can extruded
meanwhile



Screw on the nozzle,
put on the grout
gun




Inclined cut the top
of the nozzle in 45°



Squeeze out
60-80cm long grout
in the forepart



Evenly squeeze out
the tile agent along
the gap



Press the grout with
professional
glue-press tools



Don't touch in 4-5
hours and remove
excess grout then.



Keep the tiles dry in
24 hours

瓷砖美缝剂施工-瓷砖美缝剂施工步骤



Two Component Caulking Gun



Cutter
Knife



Pointing
trowel



Brush



Forming
Stick



Perching
Knife



Masking
Tape




Stainless
Steel Ball



Cleaning
Awl

瓷砖美缝剂

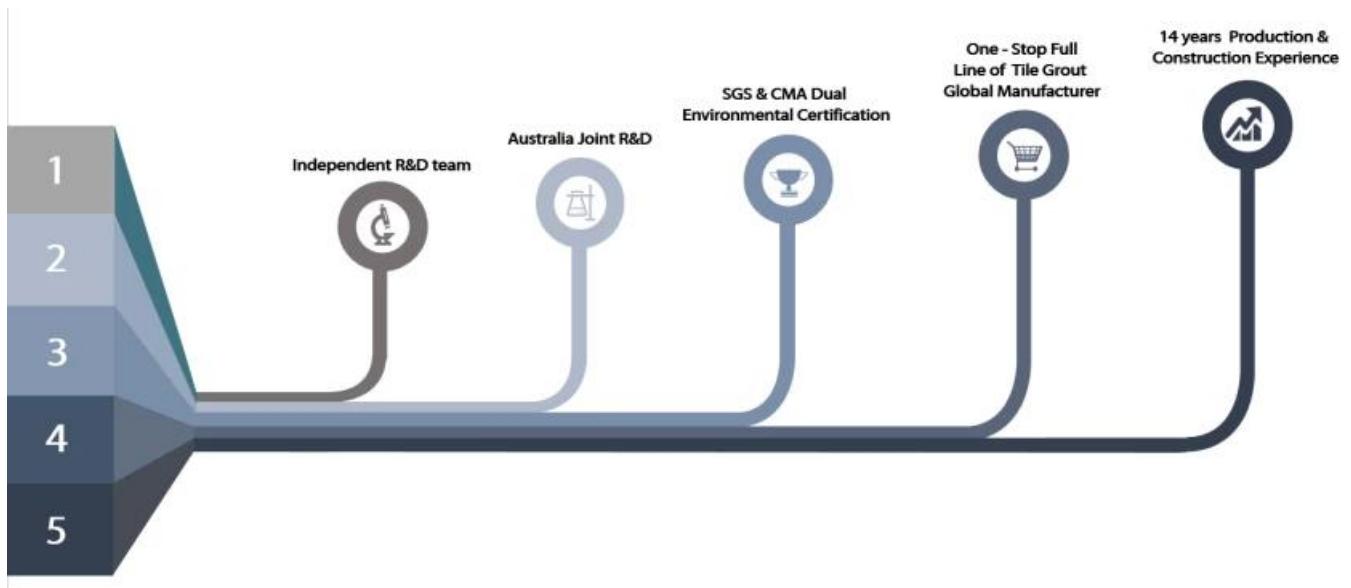

公司简介



公司优势

