

epoxy grout 是 epoxy 和 grout 的混合物，用于填充瓷砖之间的空隙。它比传统的灰浆更耐用、更耐水、更耐污。环氧灌浆适用于各种类型的瓷砖，包括陶瓷、大理石、花岗岩和天然石材。它还可以用于修复旧的灌浆，防止水分渗透和霉菌生长。环氧灌浆的优点包括：

- 高耐久性：能够承受重压和磨损。
- 防水性能：防止水分渗透到瓷砖下方。
- 抗污能力：易于清洁，不易染色。
- 美观大方：有多种颜色可供选择，能与瓷砖完美搭配。

 环氧灌浆的施工过程相对复杂，需要专业的工具和技巧。施工前需要对瓷砖表面进行彻底清洁和打磨。施工过程中要注意避免产生气泡，并确保灌浆完全填满空隙。施工后还需要进行适当的养护，才能达到最佳效果。

环氧灌浆广泛应用于浴室、厨房、游泳池、桑拿房、健身房等场所。它不仅适用于新装工程，也适用于旧楼的翻新和维修。环氧灌浆的使用寿命长，维护成本低，是提升浴室和厨房品质的理想选择。



环氧灌浆是提升浴室和厨房品质的理想选择。

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness

Dark Brown

Reddish Brown

Rock Bslack



□□□□ □□□□ □□ □□□□□□ □□□□□□ □□□□□□ □□□□□



□□□□□□□□ □□□□□□ □□□□□□□□



01

Clean the tiles and keep it dry



02

Polish with tile wax except the glazed tile



03

Open & Watch, both sides can extruded meanwhile



04

Screw on the nozzle, put on the grout gun



05

Inclined cut the top of the nozzle in 45°




06

Squeeze out 60-80cm long grout in the forepart



07

Evenly squeeze out the tile agent along the gap

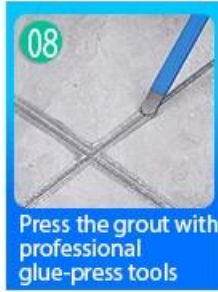


08

Press the grout with professional glue-press tools



09

Don't touch in 4-5 hours and remove excess grout then.

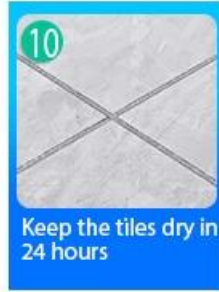


10

Keep the tiles dry in 24 hours

□□□□□□□□ □□□□□□-□□□□ □□□ □□□□□



Two Component Caulking Gun

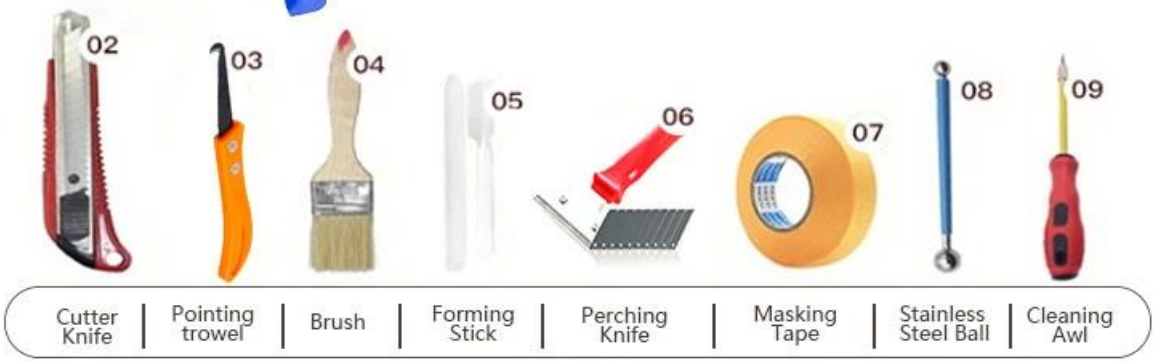

Cutter Knife | Pointing trowel | Brush | Forming Stick | Perching Knife | Masking Tape | Stainless Steel Ball | Cleaning Awl

□□□□ □□□



□□□□□□ □□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□□□

