

epoxy resin is a two-part system consisting of a resin and a hardener. When mixed together, they form a strong, durable bond. This makes epoxy ideal for bonding tiles to walls and floors. It is also used for filling gaps and repairing damaged surfaces. Epoxy is resistant to water, stains, and chemicals, making it a popular choice for high-traffic areas like bathrooms and kitchens. It is also used for creating decorative finishes and for protecting concrete surfaces. The main advantages of epoxy are its strength, durability, and resistance to moisture and chemicals. It is also easy to apply and dries quickly. However, it can be expensive and may require professional installation. Epoxy is a versatile material that can be used in a wide range of applications. It is a reliable choice for bonding tiles and for protecting surfaces. The main advantages of epoxy are its strength, durability, and resistance to moisture and chemicals. It is also easy to apply and dries quickly. However, it can be expensive and may require professional installation. Epoxy is a versatile material that can be used in a wide range of applications. It is a reliable choice for bonding tiles and for protecting surfaces.



epoxy resin is a two-part system consisting of a resin and a hardener. When mixed together, they form a strong, durable bond. This makes epoxy ideal for bonding tiles to walls and floors. It is also used for filling gaps and repairing damaged surfaces. Epoxy is resistant to water, stains, and chemicals, making it a popular choice for high-traffic areas like bathrooms and kitchens. It is also used for creating decorative finishes and for protecting concrete surfaces. The main advantages of epoxy are its strength, durability, and resistance to moisture and chemicals. It is also easy to apply and dries quickly. However, it can be expensive and may require professional installation. Epoxy is a versatile material that can be used in a wide range of applications. It is a reliable choice for bonding tiles and for protecting surfaces.

- Gray 1#
- Gray 2#
- Gray 3#
- Gray 4#
- Gray 5#
- Gray 6#
- Gray 7#
- Gray 8#
- Gray 9#
- Cement Gray
- Dull Gray
- Silver Gray
- Metal Gray
- Luxury Silver
- Glacier White
- Calaeatta
- Pearl Gold
- Slate Gray
- Terra Brown
- Greyish Green
- Yellow Gray
- Soft Khaki
- Yellowish Brown
- Olive Brown
- Brownness
- Dark Brown
- Reddish Brown
- Rock Bslack



□□□□□□ □□□□ □□ □□□□□□ □□□□□□ □□□□



□□□□□□□□ □□□□□□ □□□□□□□□



Clean the tiles and keep it dry



Polish with tile wax except the glazed tile



Open & Watch, both sides can extruded meanwhile



Screw on the nozzle, put on the grout gun



Inclined cut the top of the nozzle in 45°



Squeeze out 60-80cm long grout in the forepart



Evenly squeeze out the tile agent along the gap



Press the grout with professional glue-press tools



Don't touch in 4-5 hours and remove excess grout then.



Keep the tiles dry in 24 hours

□□□□□ □□□□□□ □□□□ □□□□ □□□□□



Two Component Caulking Gun



Cutter Knife

Pointing trowel

Brush

Forming Stick


Perching Knife

Masking Tape

Stainless Steel Ball

Cleaning Awl

□□□□ □□ □□□□□

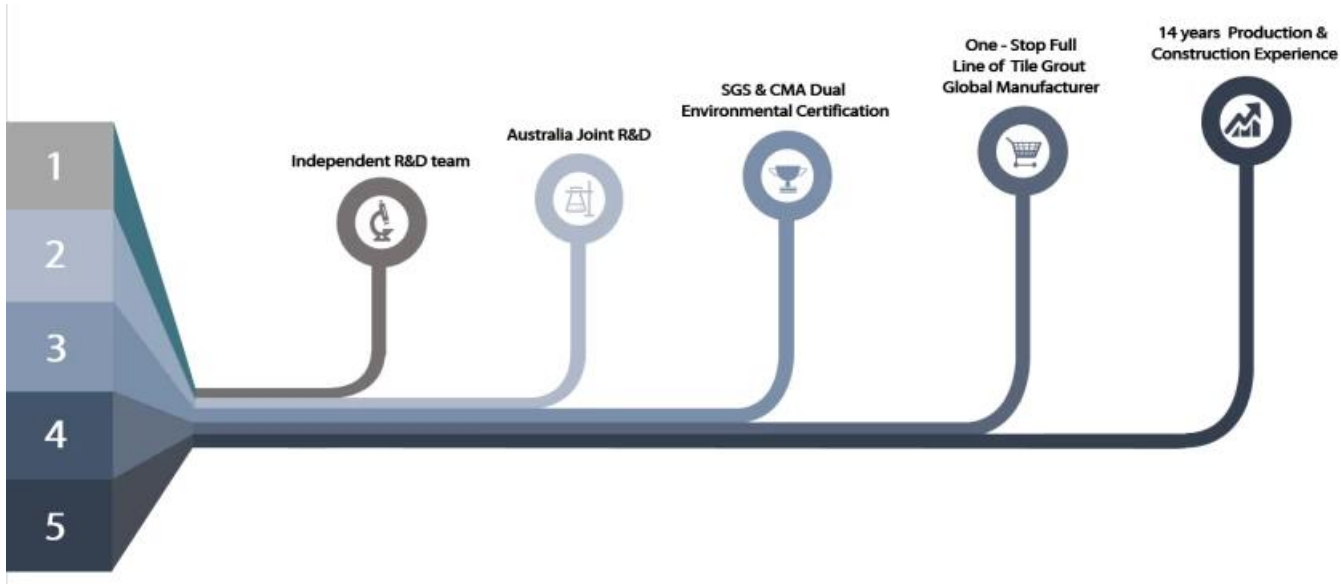

XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX

XXXXXXXXXX XXXXXXXX

