

1. **Preparation:** The surface must be clean, dry, and free of any loose material. It should be roughened with a coarse sandpaper or a similar abrasive material to ensure proper adhesion.

Material	Epoxy Grout, White Epoxy Grout
Application	Interior and exterior wall and floor
Temperature	18 °C to 37 °C
Thickness	450 mm
Time	30 min / 1 hour


2. **Application:** The grout is applied using a notched trowel. It is spread over the surface and then smoothed with a rubber float. The grout is allowed to cure for 24 hours before the final finishing.



3. **Advantages:** Epoxy grout is highly durable, resistant to stains, and easy to clean. It is also available in a wide range of colors to match the tiles.



□□□□ □□□□ □□ □□□□□□ □□□□□□ □□□□□□ □□□□

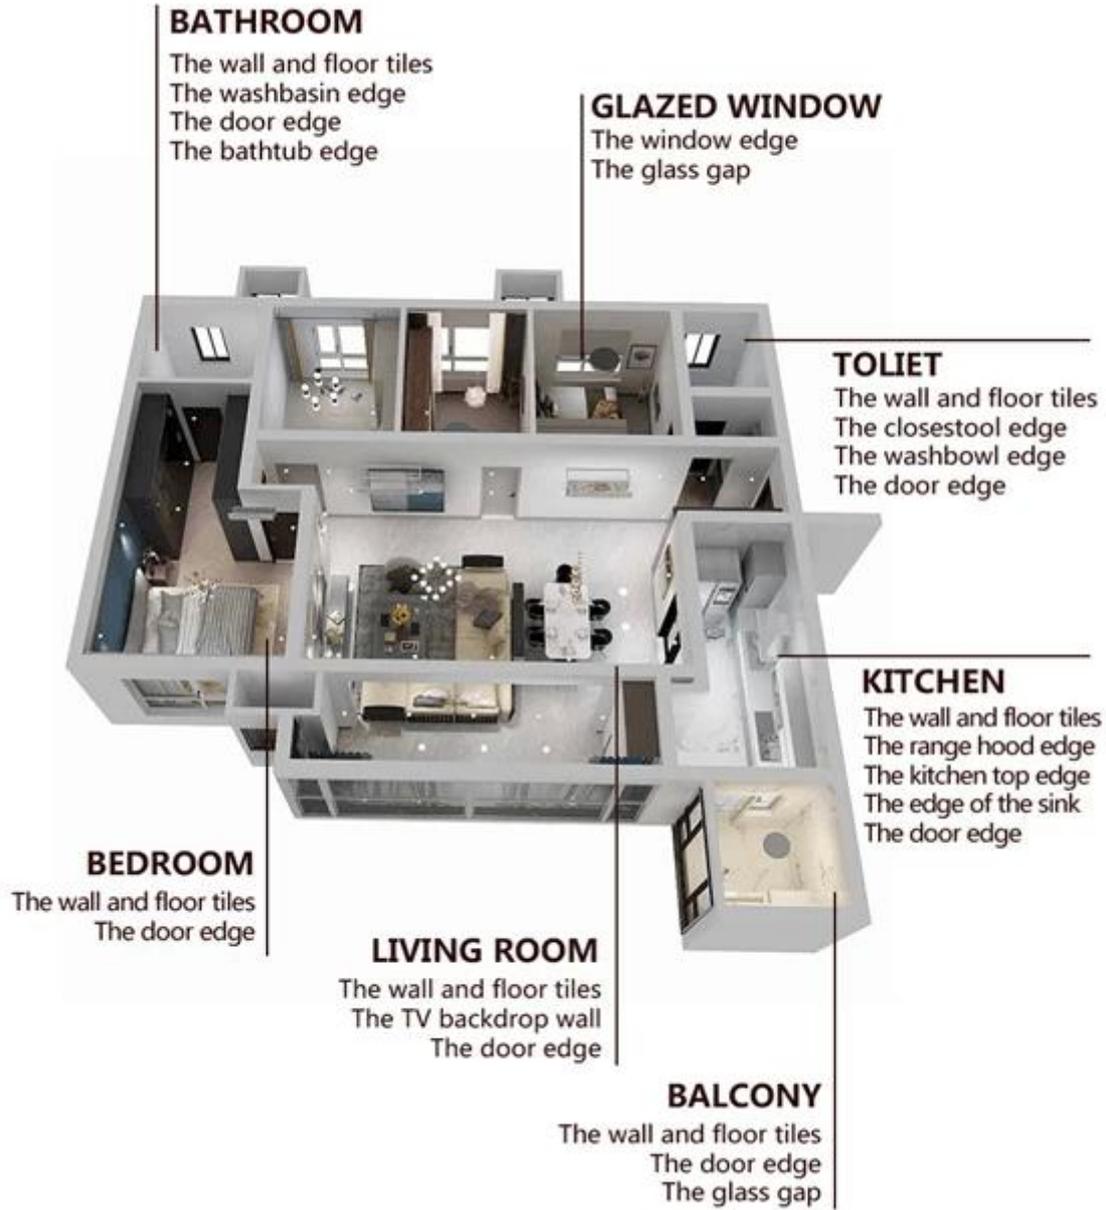

□□□□□□□□ □□□□□□ □□□□□□□□



□□□□□□ □□ □□□ □□□ □□
 □□□ □□□ □□□□□



□□□□□□□□ □□□□ □□
 □□□□□□ □□□□ □□□ □□ □□
 □□□□□□□□



□□□□ □□ □□□□, □□□□□□
 □□□□ □□ □□□□ extruded □□
 □□□□ □□□□



□□□□ □□ □□□□, grout
 □□□□□ □□ □□□□ □□□□



□□□□□□ 45 □□□□□□ □□□□
 □□□□ □□ □□□□□□ □□□□
 □□□□□□□□



Forepart 60-80 grout



Grout float



Grout float



4-5 grout float



24 grout float

Grout float



Two Component Caulking Gun



Cutter Knife



Pointing trowel



Brush



Forming Stick



Perching Knife



Masking Tape



Stainless Steel Ball



Cleaning Awl

Grout float



XXXXXXXXXX XXXXXXXXX



XXXXXXXXXX XXXXX XXXXX



XXXXXXXXXX XXXXX



XXXXXXXXXX XXXXXXXXXX XXXXX



XXXXXXXXXX XXXXXXXXXX



XXXXX XXXXX XXXXX



XXXXXXXX-XXXXXXXX XXXXX



XXXXXXXXXXXX XXXXXXXXXX XXXXXXX



XXXXXX

XXXXXXXXXXXXXXXXXX

