

epoxy grout 是环氧树脂填缝剂，用于填充瓷砖之间的空隙。它比传统的水泥基填缝剂更耐用、更防水、更易于清洁，并且不会变色。环氧树脂填缝剂适用于各种类型的瓷砖，包括陶瓷、玻璃、天然石材和马赛克。它还具有抗酸、抗碱和抗油污的特性，使其成为厨房、浴室和实验室等潮湿环境的理想选择。环氧树脂填缝剂的使用寿命长，维护成本低，是追求高品质装修效果的首选材料。

环氧树脂填缝剂广泛应用于各种室内装修场景，如厨房台面、浴室墙面、游泳池边缘等。它能够提供出色的防水性能和抗污能力，有效防止霉菌滋生和污渍渗透。此外，环氧树脂填缝剂还具有优异的耐磨性和抗压强度，能够承受日常使用中的各种摩擦和冲击。选择高质量的环氧树脂填缝剂，可以确保装修效果的持久性和美观性。



环氧树脂填缝剂广泛应用于各种室内装修场景，如厨房台面、浴室墙面、游泳池边缘等。

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness

Dark Brown

Reddish Brown

Rock Bslack



□□□□ □□□□ □□ □□□□□□ □□□□□□ □□□□□□ □□□□□



□□□□□□□□ □□□□□□ □□□□□□□□



01

Clean the tiles and keep it dry



02

Polish with tile wax except the glazed tile



03

Open & Watch, both sides can extruded meanwhile



04

Screw on the nozzle, put on the grout gun



05

Inclined cut the top of the nozzle in 45°




06

Squeeze out 60-80cm long grout in the forepart



07

Evenly squeeze out the tile agent along the gap

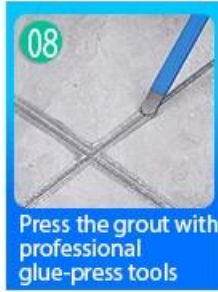


08

Press the grout with professional glue-press tools



09

Don't touch in 4-5 hours and remove excess grout then.

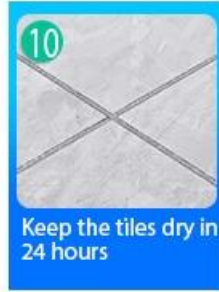


10

Keep the tiles dry in 24 hours

□□□□□□□□ □□□□□□-□□□□ □□□ □□□□



Two Component Caulking Gun

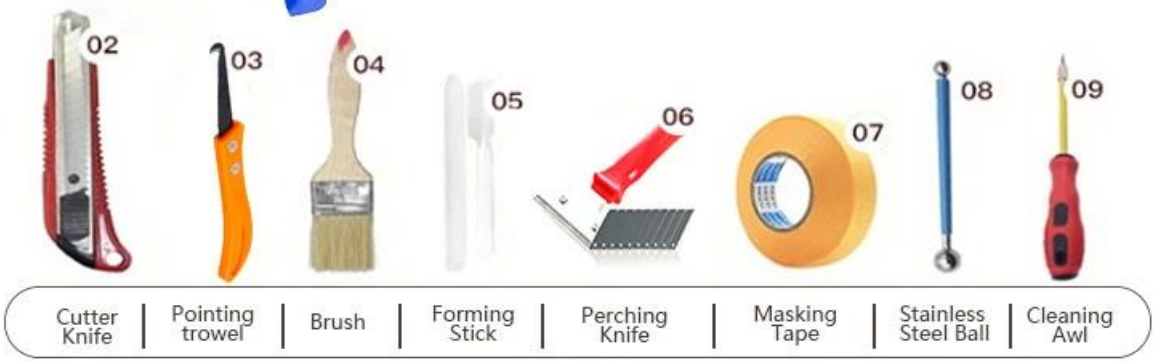

Cutter Knife | Pointing trowel | Brush | Forming Stick | Perching Knife | Masking Tape | Stainless Steel Ball | Cleaning Awl

□□□□ □□



□□□□□□ □□□□□□



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

□□□□□□□□□□

