


1. **Introduction**
 2. **Types of Tiles**
 3. **Selection of Tiles**
 4. **Installation of Tiles**
 5. **Maintenance of Tiles**
 6. **Conclusion**



1. **Introduction**
 2. **Types of Tiles**
 3. **Selection of Tiles**
 4. **Installation of Tiles**
 5. **Maintenance of Tiles**
 6. **Conclusion**



□□□□□□ □□□□ □□ □□□□□□ □□□□□□ □□□□

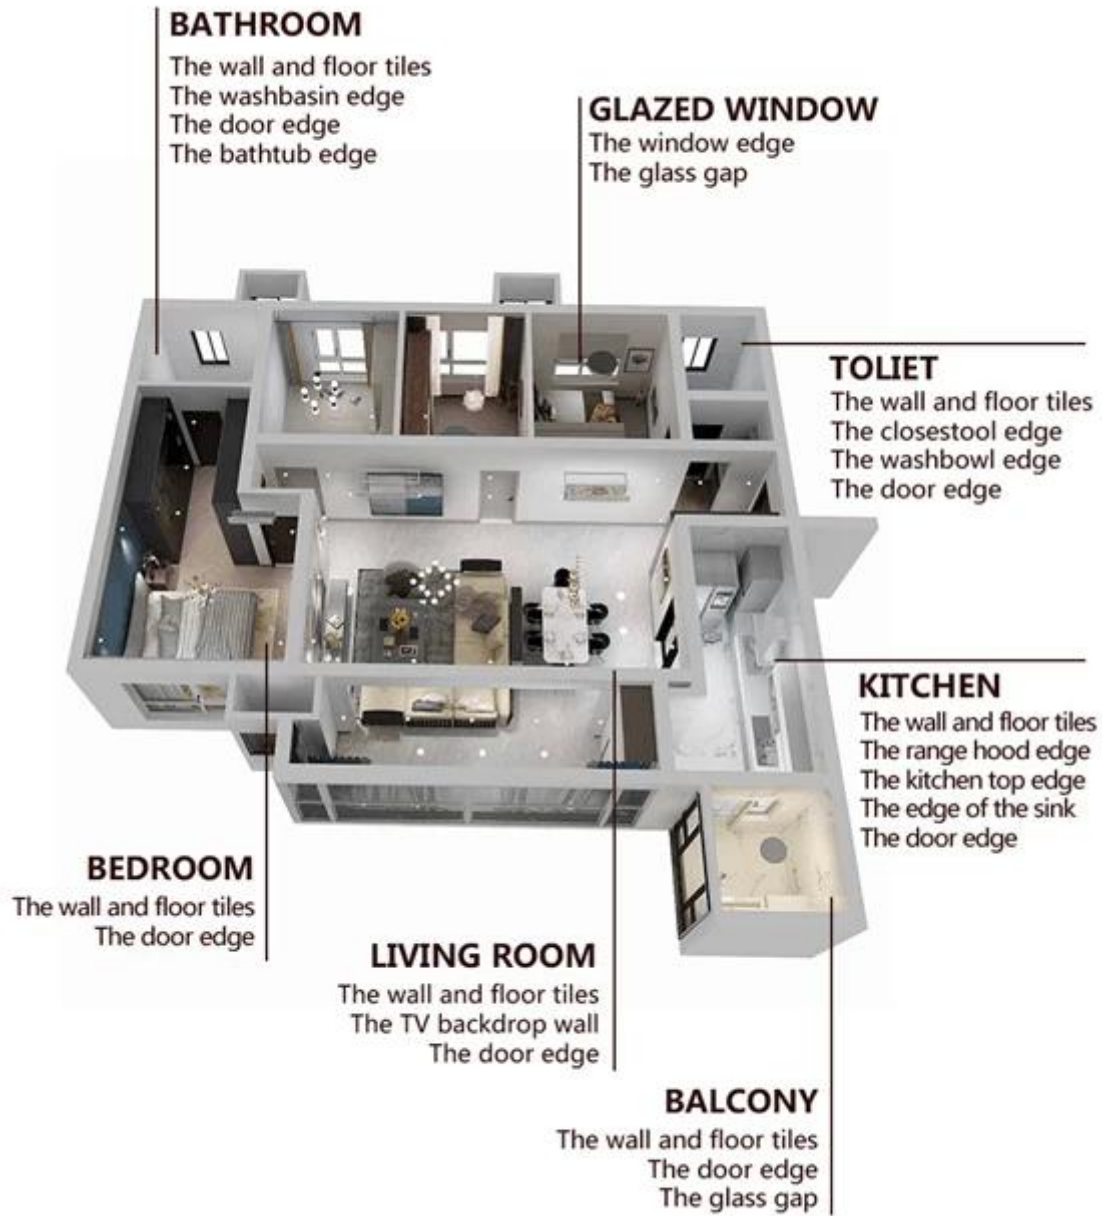


□□□□□□□□ □□□□□□ □□□□□□□□




Clean the tiles and keep it dry



Polish with tile wax except the glazed tile

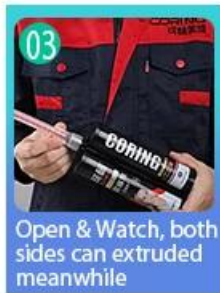

Open & Watch, both sides can extruded meanwhile

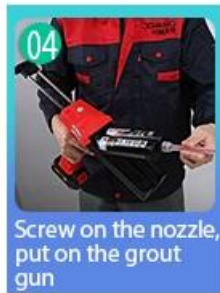

Screw on the nozzle, put on the grout gun



Inclined cut the top of the nozzle in 45°



Squeeze out 60-80cm long grout in the forefront




Evenly squeeze out the tile agent along the gap



Press the grout with professional glue-press tools



Don't touch in 4-5 hours and remove excess grout then.



Keep the tiles dry in 24 hours

□□□□□ □□□□□□□ □□□□□ □□□□ □□□□□



Two Component Caulking Gun



Cutter Knife



Pointing trowel



Brush



Forming Stick



Perching Knife



Masking Tape



Stainless Steel Ball



Cleaning Awl

□□□□□ □□ □□□□□



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX



XXXXXXXXXX XXXXXXXX XXXXXXXX




XXXXXXXXXX XXXXXXXX



XXXXXXXX XX XXXXXXX XXXXXXX



XXXXXXXX-XXXXXXXX XXXXXXX

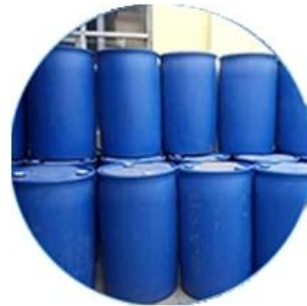

XXXXXXXXXXXX XXXXXXXXXX XXXXXXX



XXXXXXXXXX

XXXXXXXXXXXXXXXXXX

